


WELL NOTES:

1. WELL SHALL HAVE AN IMPERMEABLE SURFACE SURROUNDING THE WELL FOR A MINIMUM OF 2 FEET ON ALL SIDES.



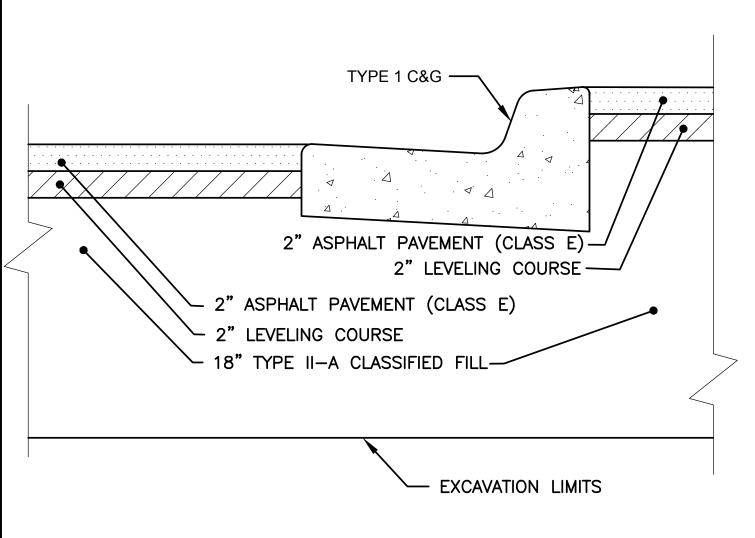


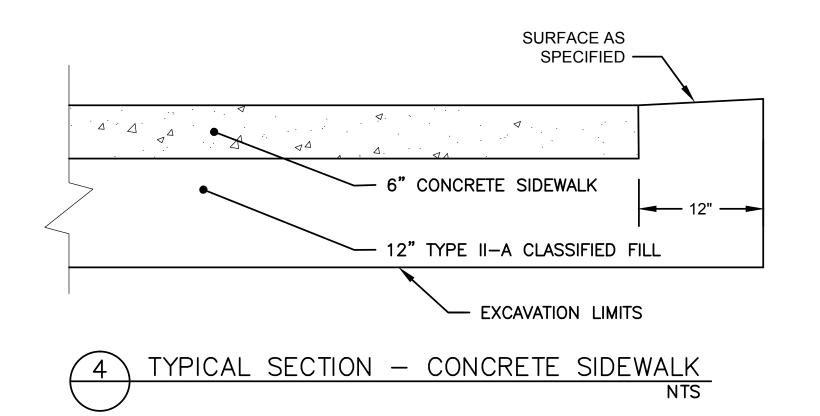

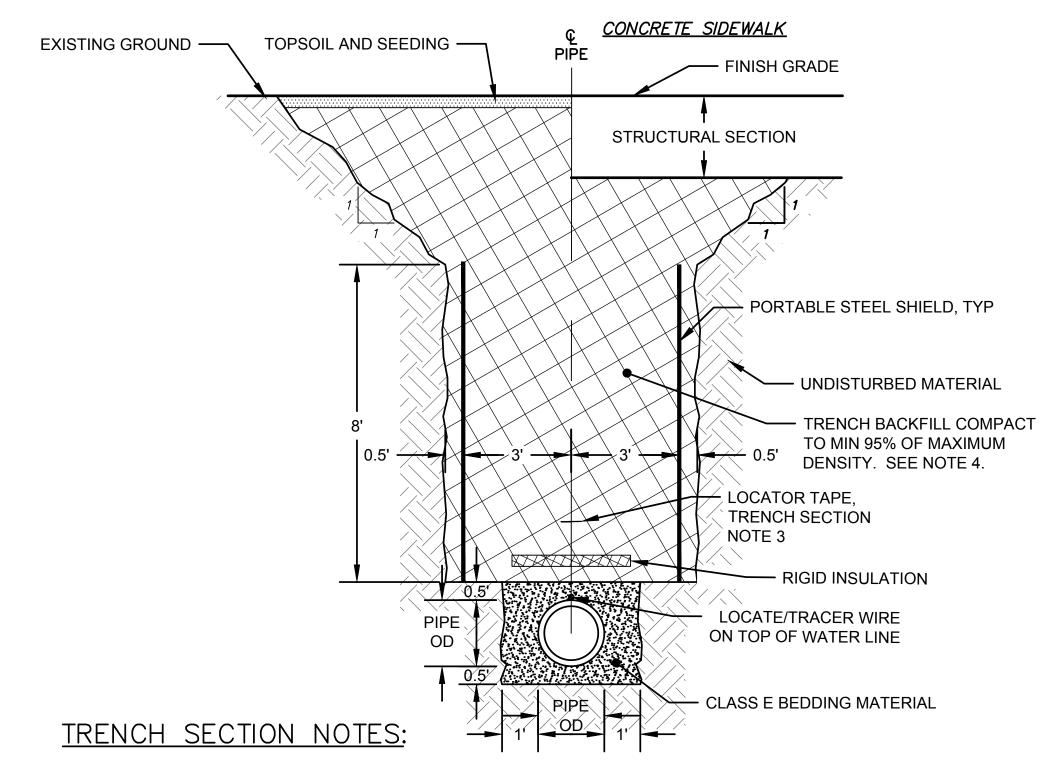

- TRENCH EXCAVATION AND SHORING SHALL COMPLY WITH ALL LOCAL, STATE AND OSHA REGULATIONS AND REQUIREMENTS.
- 2. SLOPE TRENCH WALLS ACCORDING TO THE SOIL CONDITIONS AND O.S.H.A. SAFETY STANDARDS. INDICATED SLOPES AND DIMENSIONS ARE FOR PAY QUANTITY DETERMINATION ONLY
- 3. INSTALL LOCATOR TAPE 1' ABOVE TOP OF INSULATION. IF NO INSULATION INSTALL 1.5' ABOVE TOP OF
- 4. TRENCH BACKFILL SHALL BE NATIVE MATERIAL MEETING, MEETING TYPE III CLASSIFICATION (MINIMUM) AS APPROVED BY THE ENGINEER. NATIVE MATERIAL NOT MEETING TYPE III CLASSIFICATION SHALL BE REMOVED AND REPLACED WITH MATERIAL MEETING TYPE III CLASSIFICATION (MINIMUM).
- 5. REMOVE AND DISPOSE OF ALL ORGANIC MATERIALS IN ACCORDANCE WITH M.A.S.S. SECTION 20.13.



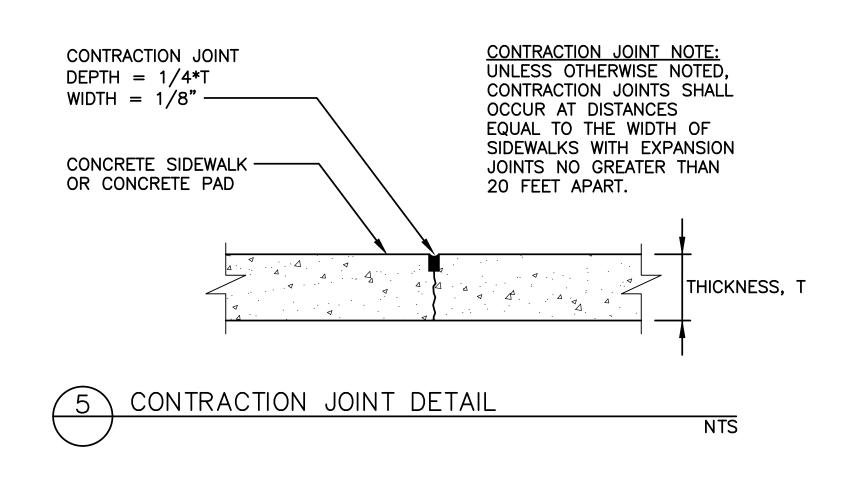







R&M CONSULTANTS, INC. ANCHORAGE, ALASKA

> STEMS CHANICAL SYSTEM STORY OF STORY EM-2 MEC NSB

Revisions No. Date Description Design:

UAA Project No.: 02/17/2017 Sheet Title **DETAILS**

Sheet Number

C4.0