


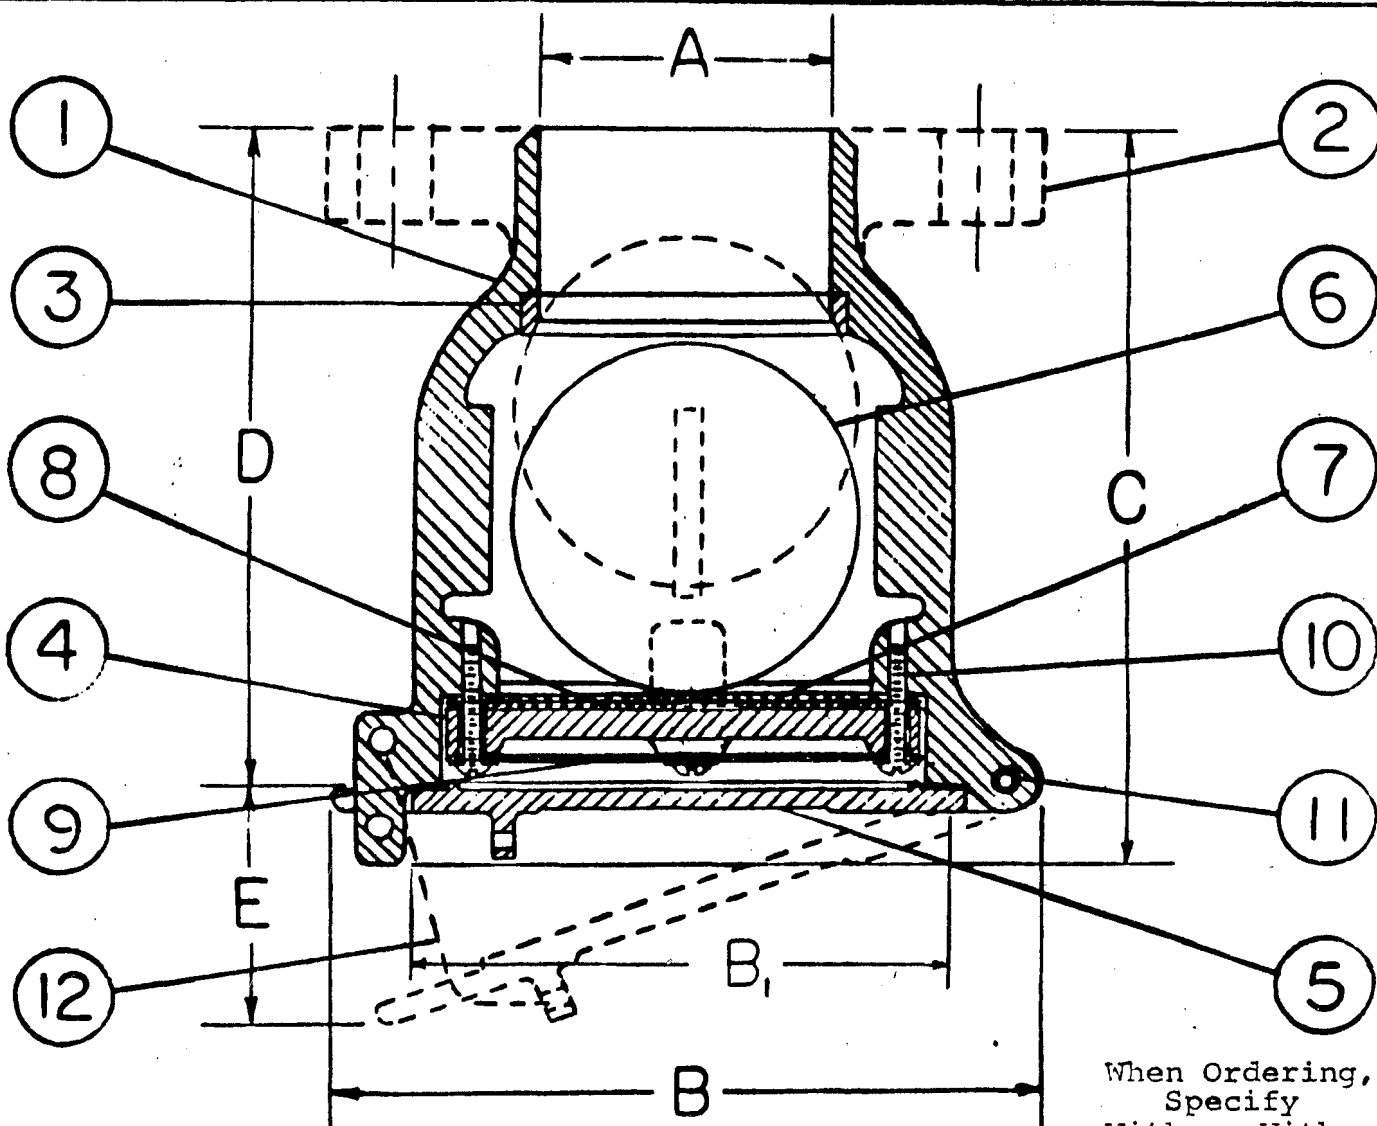

When Ordering,
Specify
With or Without
HINGED COVER

Available in the following connections:
BUWT WELD, SOCKET WELD, SIL-BRAZE, THREADED (NPT),
CAST FLANGE, and WELDED STEEL SLIP-ON FLANGE.
Flanges Drilled 150# Commercial unless specified otherwise.

MATERIALS

1	Body	Cast Steel, Iron,
2	Flange	(Galv. or Black)
3	Seat	Cast Bronze, Alum,
4	Spacer	Stainless Steel,
5	Cover	Monel, etc.
6	Float	Cu., S.S., or MONEL
7	Float Rest Screen	Stainless Steel,
8	Flame Screen	Brass, or Monel
9	Protective Screen	
10	Screws & Washers	Brass, Stainless
11	Hinge Pin	Stainless Steel
12	Toggle Assembly	

DIMENSIONS -- INCHES

	A	B ₁	B	C	D	E
	(IPS)					
1	3/4	3 1/4	4-5/8	5 1/4	4 1/2	1 1/4
2	1 1/2	3 1/2	4-5/8	5 1/4	4 1/2	1 1/4
3	1 1/2	3 1/2	4-5/8	5 1/4	4 1/2	1 1/4
4	2 1/2	5 1/2	7 1/4	7 1/2	6-3/4	2 1/2
5	3 1/2	5 1/2	7 1/4	7 1/2	6-3/4	2 1/2
6	3 1/2	7	9	9	8 1/2	3
7	4	7 1/4	9	9	8 1/4	4
8	5	9	10	10	9 1/4	5

GALVANIZED
STEEL AND
BRONZE IN
STOCK

KINGS POINT MACHINERY,
9936 Gould Street
Oakland, CA 94603
(510) 638-2712
FAX (510) 638-3339

TITLE

INVERTED VENT CHECK VALVE
3/4" IPS through 5" IPS

DRAWN BY
GRW

CHECKED BY
DCW

SCALE
NTS

APPROVED

DATE

3-9-87

DRAWING NO.
1027

REV.
0

SHEET
1 of 1

Robert H Wager Co., Inc.

570 Montroyal Road
Rural Hall, NC 27045
Ph: 800-562-7024
Fx: 336-969-6375
www.wagerusa.com



1700 Series (w/ full float)

When Ordering, Please Specify:
Body Material, Connection, and Float Material

- Body Materials:
- 1020 Galvanized Steel
 - Bronze (ASTM-B62)
 - Anodized Aluminum (356-T6)
 - Stainless Steel (316)

- Float Materials:
- 316 Stainless Steel (Standard)
 - Copper
 - High Density Polyethylene (Plastic)
 - Monel

- Connections:
- Threaded
 - Buttweld (Steels Only)
 - Socketweld (Steels and Aluminum Only)
 - Flanged
 - Sil-Brazed (Bronze Only)

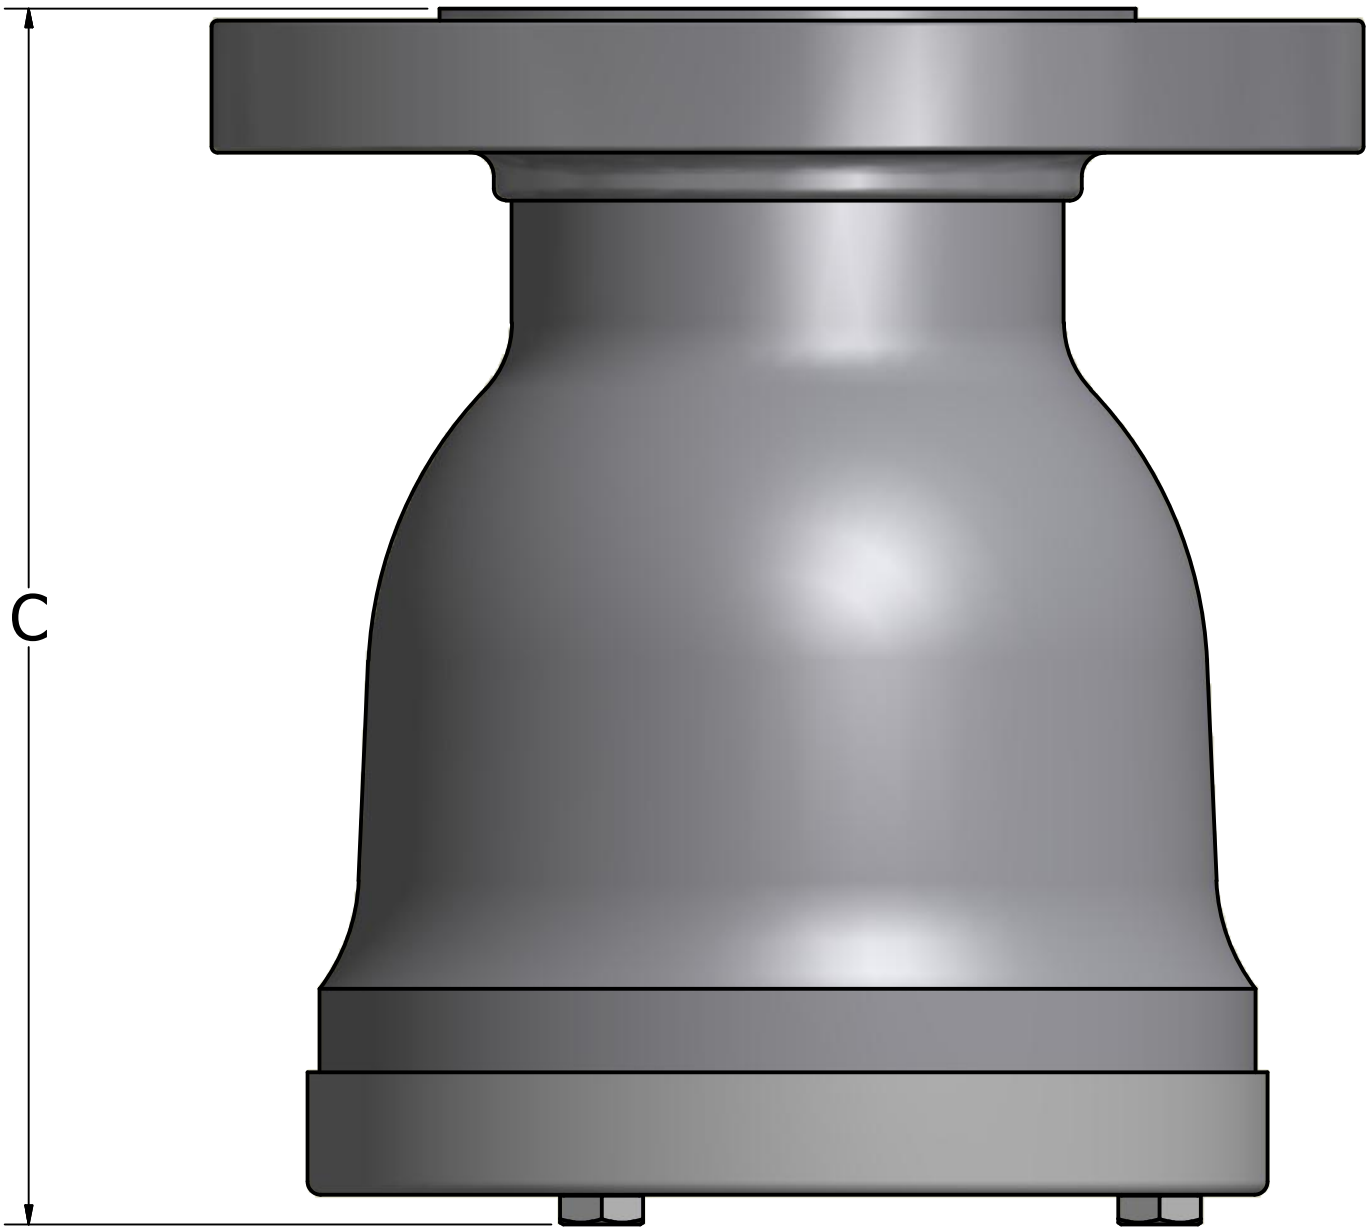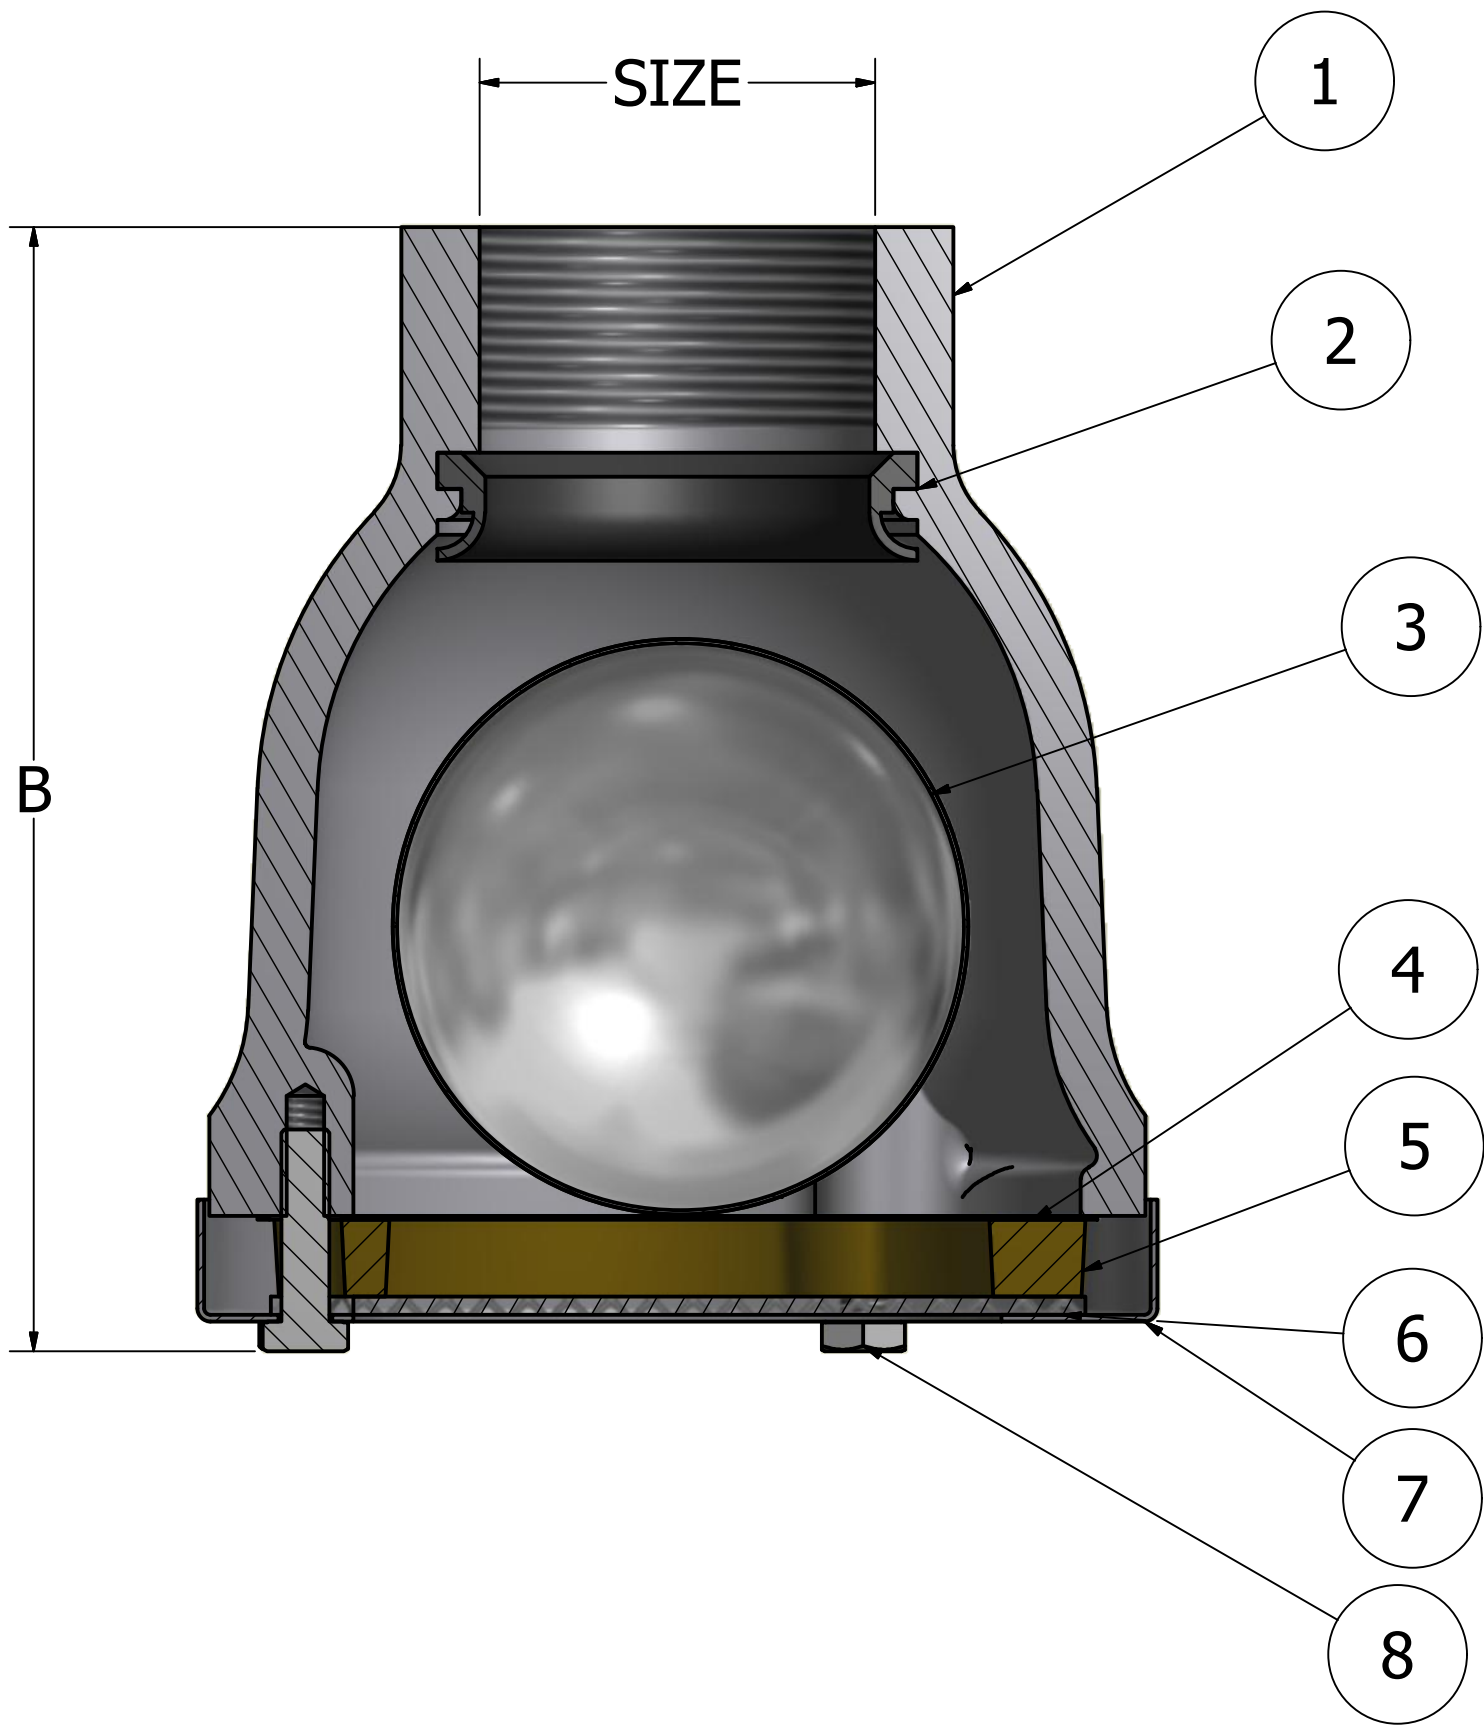

Parts List		
ITEM	QTY	NAME OF PART
1	1	BODY
2	1	SEAT
3	1	FLOAT
4	1	FLAME SCREEN
5	1	SPACER RING
6	1	PROTECTIVE SCREEN
7	1	RETAINER CAP
8	*	CAP MOUNTING BOLTS

SIZE CHART							
SIZE	A	B	C	WEIGHT	W/ FLANGE	# OF HOLES	HOLE SIZE
.75,1,1.25 STEEL	4.500	4.875	5.25	5 (LB)	8 (LB)	4	0.625
ONLY 1.5 ALL							
2-ALL	5.375	5.937	6.437	8	12	4	0.750
2.5-ALL	6.250	6.375	7.000	10	17	4	0.750
3-ALL	7.125	7.250	7.937	15	24	4	0.750
4-ALL	7.813	8.750	9.5625	20	31	8	0.750
.75,1,1.25 BRONZE	4.000	4.189	4.25	3.5B,1.5A	2.25	4	0.625
& ALUMINUM					ALUMINUM ONLY		

* 4" HAS (4) MOUNTING BOLTS AND WASHERS