

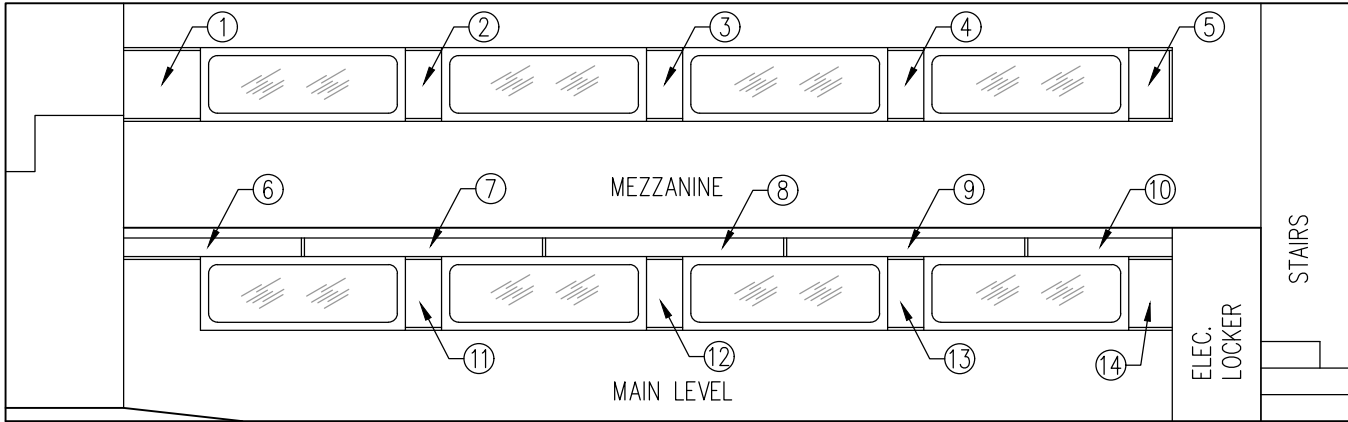


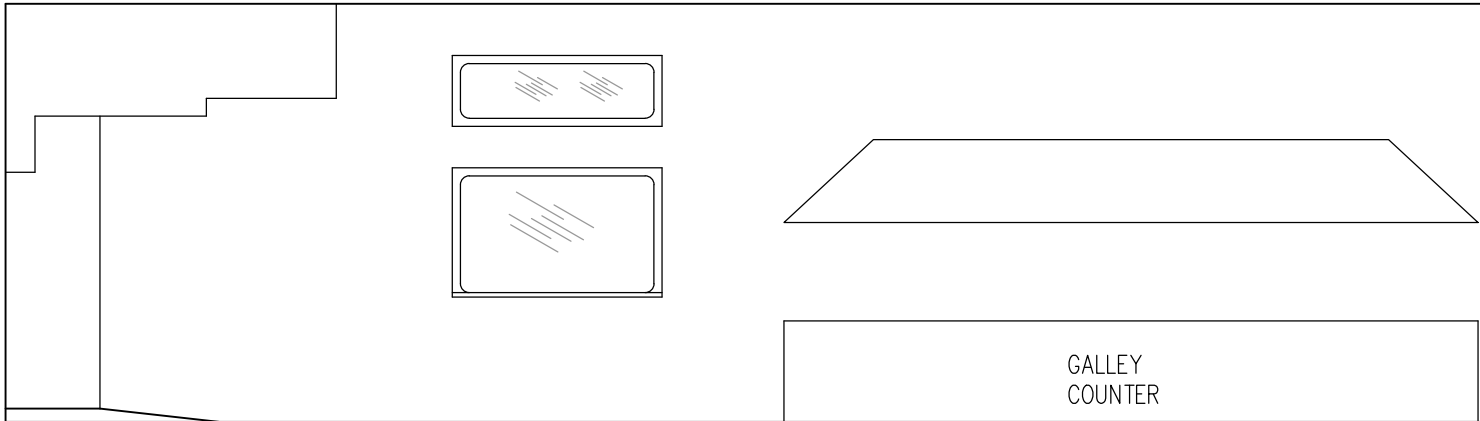

A End

A  
1  
ARR 352 WALL LAMINATES  
RIGHT SIDE INTERIOR ELEVATION

B End

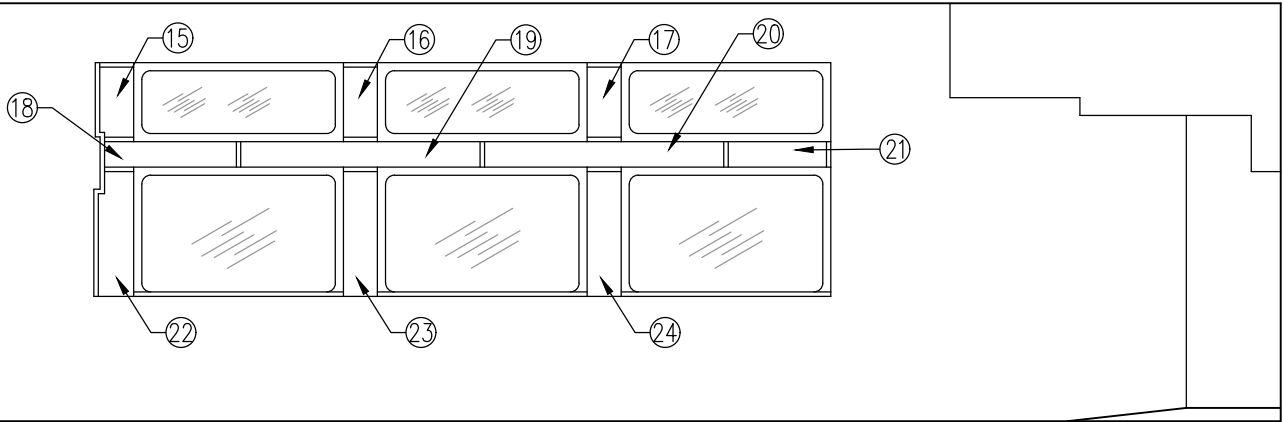

B End

B  
1  
ARR 352 WALL LAMINATES  
LEFT SIDE INTERIOR ELEVATION

A End

| WALL LAMINATES |                 |  |    |                 |  |
|----------------|-----------------|--|----|-----------------|--|
| PN             | DIM             |  | PN | DIM             |  |
| 1              | 24 1/4 x 23 3/4 |  | 12 | 12 1/4 x 24 1/4 |  |
| 2              | 12 1/4 x 24     |  | 13 | 12 1/8 x 24 1/4 |  |
| 3              | 12 1/4 x 24     |  | 14 | 14 3/4 x 24 1/4 |  |
| 4              | 12 1/4 x 24     |  | 15 | 11 3/8 x 24     |  |
| 5              | 14 3/4 x 24     |  | 16 | 11 1/4 x 24 1/4 |  |
| 6              | 60 x 6 1/4      |  | 17 | 11 1/8 x 24 1/8 |  |
| 7              | 81 x 6 1/4      |  | 18 | 44 3/8 x 8 3/8  |  |
| 8              | 81 1/4 x 6 3/8  |  | 19 | 81 x 8 3/8      |  |
| 9              | 80 3/4 x 6 1/4  |  | 20 | 81 x 8 5/8      |  |
| 10             | 48 7/8 x 6 1/4  |  | 21 | 34 x 8 5/8      |  |
| 11             | 12 1/8 x 24 1/4 |  | 22 | 12 x 40 1/4     |  |
|                |                 |  | 23 | 11 1/2 x 40 1/4 |  |
|                |                 |  | 24 | 11 5/8 x 40 1/4 |  |
|                |                 |  | 25 | 11 1/4 x 23 3/4 |  |
|                |                 |  | 26 | 11 1/4 x 23 3/4 |  |
|                |                 |  | 27 | 44 3/8 x 8 1/4  |  |
|                |                 |  | 28 | 81 x 8 1/4      |  |
|                |                 |  | 29 | 81 1/8 x 8 1/8  |  |
|                |                 |  | 30 | 44 3/4 x 8 1/4  |  |
|                |                 |  | 31 | 11 3/4 x 55 1/4 |  |
|                |                 |  | 32 | 11 5/8 x 55 1/4 |  |
|                |                 |  | 33 | 66 X 33         |  |

- NOTES:
1. WALL LAMINATE TO BE FORMICA 920-58 'ALMOND', MATTE FINISH.
  2. ALLOW 1/8" GAP BETWEEN LAMINATE AND SOLID SURFACE WALL TRIM AND WINDOW SURROUNDS TO ALLOW FOR EXPANSION AND CONTRACTION.
  3. FASTEN LAMINATE TO WALL USING 3M 1357 CONTACT ADHESIVE OR SIMILAR.
  4. CAULK PERIMETER OF INSTALLED LAMINATES USING CLEAR SILICONE.



**ALASKA RAILROAD CORPORATION**  
ENGINEERING SERVICES  
P.O. BOX 107500, ANCHORAGE, ALASKA 99510-7500

PROJECT :  
**MOTIVE POWER AND EQUIPMENT  
PASSENGER EQUIPMENT**

TITLE:  
**ARR 352 INTERIOR REFURBISHMENT  
WALL LAMINATE**

DESIGNED BY: CDL  
DRAWN BY: CDL  
CHECKED BY: ARRC  
APPROVED BY: ARRC

SCALE : NTS  
DATE : NOVEMBER 2022

AFE NO.: 10970 2022 FTA  
ACAD FILE:  
DWG NO.  
**1** OF **1**