OPENING SCHEDULE

OPENING	NAME	TYPE	DOOR OR BORROWED LITE SIZE WIDTH	HEIGHT	MAT	FINISH	FRAME TYPE	MAT	FINISH	GLAZING TYPE	NOTES
BB100D1	COMM	F	3' - 0"	7' - 0"	WD	CL	1	ST	FF		LOUVER
BB100M1	MEN	F	3' - 0"	7' - 0"	WD	CL	1	ST	FF		
BB100T1	UNISEX	F	3' - 0"	7' - 0"	WD	CL	1	ST	FF		
BB100T2A	JANITOR	F	3' - 0"	7' - 0"	WD	CL	1	ST	FF		
BB100UI	ELEC	F	3' - 0"	7' - 0"	WD	CL	1	ST	FF		
BB100V2B	VESTIBULE	FG	3' - 0"	7' - 0"	AL	FF	3	AL	FF	SG	
BB100W1	WOMEN	F	3' - 0"	7' - 0"	WD	CL	1	ST	FF		
BB101	RECITATION 1	FG	3' - 0"	7' - 0"	WD	CL	3	ST	FF	SG	
BB103	OFFICE 1	FG	3' - 0"	7' - 0"	WD	CL	2	ST	FF	SG	
BB105	STORAGE/SPRINKLER	F	3' - 0"	7' - 0"	WD	CL	1	ST	FF		
BB129A	STORAGE	F	6' - 0"	7' - 0"	WD	CL	1	ST	FF		
BB131	OFFICE 4	FG	2' - 11 13/64"	7' - 0"	WD	CL	1	ST	FF	SG	
BB141	OFFICE 3	FG	3' - 0"	7' - 0"	WD	CL	1	ST	FF	SG	

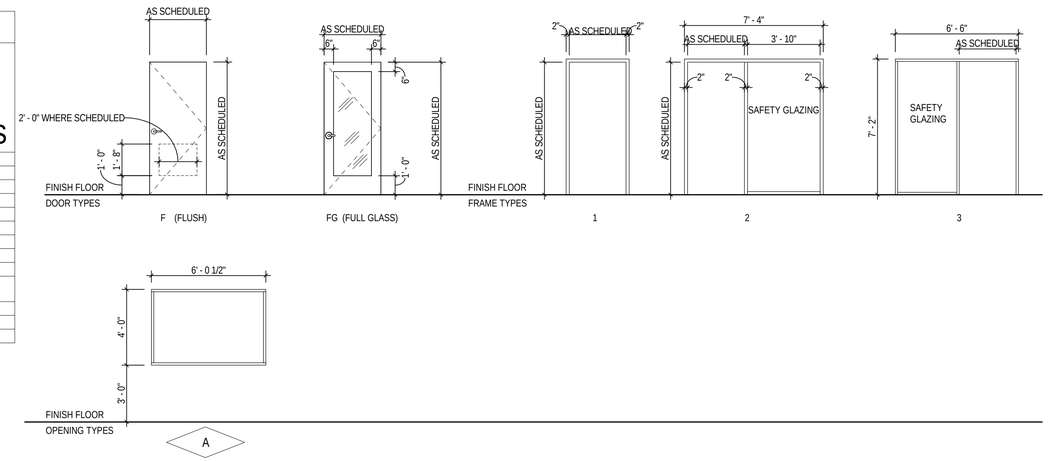

DOOR, FRAME, AND OPENING TYPES

INTERIOR FINISH LEGEND:

		CODE	MATERIAL	MANUFACTURER	STYLE/ COLOR	SIZE	NOTES
FLOOR		WOC-1	WALK-OFF CARPET TILE	INTERFACE	FLOR ENTRY LEVEL; 7193 BROWN	24" X 24"	---
		CPT-1	MODULAR CARPET TILE	TANDUS	RATIO 03589; TRICHROME 79001	24" X 24"	MONOLITHIC INSTALLATION
		CPT-2	MODULAR CARPET TILE ACCENT	TANDUS	TENERA 04120; COPAL 45202	24" X 24"	MONOLITHIC INSTALLATION
		CPT-3	MODULAR CARPET TILE ACCENT	TANDUS	TENERA 04120; EMERY STONE 45210	24" X 24"	MONOLITHIC INSTALLATION
		RF-1	RESILIENT FLOORING	LONSEAL	LONECO W/TOPSEAL; 7233 LAVENDER	6' ROLL	---
		RF-1	RESILIENT FLOORING	KARNDEAN	LOOSE LAY1; TASMANIAN WATTLE LLP38	41.3" X 9.85" PLANK	RUNNING BOND INSULATION
		PT-1	PORCELAIN TILE	PENTAL	ON SQUARE; CEMENTO NATURALE	12" X 24"	NATURALE FINISH, STRAIGHT LAY INSTALLATION
BASE		RB-1	RUBBER WALL BASE	ROPPE	150 DARK GRAY	4-1/2" HIGH	
WALL		P-1	FIELD PAINT	SHERWIN-WILLIAMS	SW7008 ALABASTER	---	EGGSHELL- UNO
		P-2	ACCENT PAINT	SHERWIN-WILLIAMS	SW7059 UNUSUAL GRAY	---	EGGSHELL- UNO
		P-3	ACCENT PAINT	SHERWIN-WILLIAMS	SW6116 TATAMI TAN	---	EGGSHELL- UNO
		P-4	ACCENT PAINT	BENJAMIN MOORE	SW2124-20 TROUT GRAY	---	EGGSHELL- UNO
		P-5	ACCENT PAINT	SHERWIN-WILLIAMS	SW6197 ALOOF GRAY	---	EGGSHELL- UNO
		P-6	ACCENT PAINT	SHERWIN-WILLIAMS	SW6493 EBBTIDE	---	EGGSHELL- UNO
		PT-1	PORCELAIN WALL TILE	OLYMPIA TILE	MAPLE LEAFS COLOUR; WARM WHITE MATTE	4" X 16"	MATTE FINISH
CEILING		ACt-1	ACOUSTICAL CEILING TILE	ARMSTRONG	TBD	12" X 24"	INSTALL AFTER GRID IS PAINTED
MISCELLANEOUS		PL-1	PLASTIC LAMINATE	FORMICA	7747-58 PENCIL WOOD	---	VERTICAL FACES OF CASEWORK; SELF EDGE
		PL-2	PLASTIC LAMINATE	FORMICA	928-58 MOUSE	---	COUNTERTOPS; SELF EDGE
		SS-1	SOLID SURFACE	AVONITE	K3-8425 CEMENT	SATIN FINISH	---
		WD-1	SOLID WOOD, DOORS	VT INDUSTRIES	WHITE ASH, A GR CTRLD WD; CLEAR 07	---	TYP DOORS
		RS-1	ROLLER SHADES	PFIFER SHEET WEAVE #2390	P14 OYSTER/PEARL GRAY	---	5% OPENNESS FACTOR; ALUMINUM FACIA

* SUBMITTALS INCLUDING MATERIAL SAMPLES, CUTSHEETS, AND SHOP DRAWINGS OF ALL MATERIALS AND CASEWORK MUST BE PROVIDED TO DESIGNER FOR APPROVAL PRIOR TO PROCUREMENT AND FABRICATION.

RIM ARCHITECTS
ALASKA HAWAII GUAM CALIFORNIA
645 'G' STREET, SUITE 400
ANCHORAGE, ALASKA 99501
Phone: 907.258.7777
Fax: 907.279.8195
www.rimarchitects.com

CONSTRUCTION DOCUMENTS

PROJECT TITLE: UAA ANSEP ULA RENOVATION
ADDRESS: UNIVERSITY LAKE BUILDING - BUILDING AO 107
OWNER: UNIVERSITY OF ALASKA ANCHORAGE
SHEET TITLE: ARCHITECTURAL SCHEDULES

NO	DESCRIPTION	DATE

DATE : 2017.04.07
PROJECT NO : 151065.101
DRAWN BY : Author
CHECKED BY : Checker
COPYRIGHT : 2017 RIM ARCHITECTS
CORPORATE NO. AECL 1227

DWG NO:
A601